



**ProTec® XXL**  
System

## Double-width aluminium mobile scaffold

### The sturdy ProTec XXL with the extra large platform for more efficient working conditions.

- + TÜV-approved, suitable for a max. load of 200 kg/m<sup>2</sup> in accordance with DIN EN 1004-1
- + Max. working height 12.30 m (outdoors max. 10 m in accordance with DIN EN 1004-1)
- + The safe construction is ensured due to the fixation of the rail frame GuardMatic-system before the next higher platform will be assembled. When climbing through the next platform a complete railing and therefore a fall protection is available
- + The integration of the diagonal braces into the GuardMatic-System guarantees an easy and safe assembly. For transport or storage the rail frame GuardMatic-System can be folded space-saving
- + The 6-point fixation of the GuardMatic-System provides a maximum of safety in the height. Force-fit semi-automatic diagonal brace connections for easy, quick and safe erection
- + The innovative structure of the diagonal braces ensures maximum floor space on the platform and disturbs in no way
- + Maximum platform distance of 2 m for comfortable and safe erection without tools
- + Safe internal ascent due to its slip-resistant, profiled rungs
- + Two 1-meter vertical frames (included in the scope of delivery) which can be connected to a 2-meter vertical frame enable a flexible erection
- + The platform is made of weatherproof and slip-resistant phenolic resin impregnated plywood (2.00 m x 1.20 m)
- + Height-adjustable and braked castors to compensate differences in height on uneven grounds
- + Starting with a working height of 6.30 m the easy-to-fit outriggers provide extra stability
- + Extremely stable due to its high-strength steel stabilizer starting with a working height of 4.30 m



www.krause-systems.com



Working height: 2.90 m  
Platform height: 0.90 m  
Scaffold height: 2.30 m



Working height: 4.30 m  
Platform height: 2.30 m  
Scaffold height: 3.50 m




Working height: 5.30 m  
Platform height: 3.30 m  
Scaffold height: 4.50 m




Working height: 6.30 m  
Platform height: 4.30 m  
Scaffold height: 5.50 m




Working height: 7.30 m  
Platform height: 5.30 m  
Scaffold height: 6.50 m




Working height: 8.30 m  
Platform height: 6.30 m  
Scaffold height: 7.50 m




Working height: 9.30 m  
Platform height: 7.30 m  
Scaffold height: 8.50 m

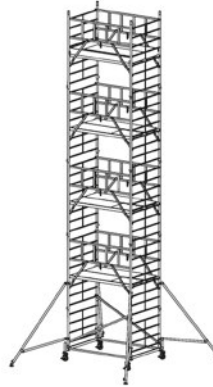

Working height: 10.30 m  
Platform height: 8.30 m  
Scaffold height: 9.50 m

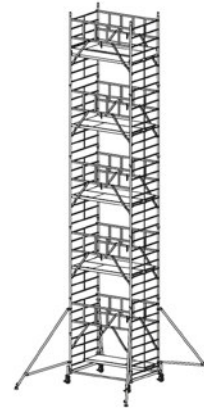

Working height: 11.30 m  
Platform height: 9.30 m  
Scaffold height: 10.50 m

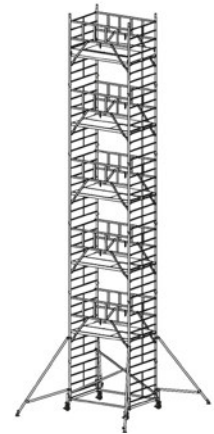

Working height: 12.30 m  
Platform height: 10.30 m  
Scaffold height: 11.50 m

**Field length of scaffold: 2.00 m – Field width of scaffold: 1.40 m**

	A up to approx.	m	2.90	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30	12.30
	B approx.	m	0.90	2.30	3.30	4.30	5.30	6.30	7.30	8.30	9.30	10.30
	C approx.	m	2.30	3.50	4.50	5.50	6.50	7.50	8.50	9.50	10.50	11.50
Floor area		m	1.70 x 2.00	1.70 x 2.00	1.70 x 2.00	3.70 x 4.20	3.70 x 4.20	3.70 x 4.20	3.70 x 4.20	3.70 x 4.20	3.70 x 4.20	3.70 x 4.20
Weight		kg	62.0	110.0	135.0	191.0	215.0	239.0	263.0	287.0	312.0	336.0
Art.-No.			945105	945112	945129	945136	945143	945150	945167	945174	945181	945198

Parts list	Art.-No.	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity
Vertical frame 2.00 m	915078	2	2	3	4	5	6	7	8	9	10
Vertical frame 1.00 m	915085	0	2	2	2	2	2	2	2	2	2
Platform with hatch 2.00 x 0.60 m	911001	1	1	2	2	3	3	4	4	5	5
Platform without hatch 2.00 x 0.60 m	911018	1	1	1	2	2	3	3	4	4	5
Diagonal brace	912879	1	2	0	2	0	2	0	2	0	2
Rail brace	912855	1	0	0	0	0	0	0	0	0	0
Base brace 2.00 m	912848	0	2	2	2	2	2	2	2	2	2
Stabiliser	914071	0	2	2	2	2	2	2	2	2	2
Outtrigger	914095	0	0	0	4	4	4	4	4	4	4
Longitudinal board 1.35 m	913562	0	2	2	2	2	2	2	2	2	2
Transversal board 2.00 m	913517	0	2	2	2	2	2	2	2	2	2
Set of castors ø 150 mm, height-adjustable	914323	1	1	1	1	1	1	1	1	1	1
Foot plate	914026	4	4	4	4	4	4	4	4	4	4
Gravity pin	704405	4	8	10	12	14	16	18	20	22	24
GuardMatic-System	910073	0	2	4	4	6	6	8	8	10	10

**Accessories**

Set of stabilisers 1.2 m	Set of stabilisers 1.5 m	Ballast weight	Set of castors ø 150 mm, height-adjustable	Safety set for rail brace/diagonal brace M5 x 65 mm	Safety set for platform M5 x 95 mm
Art.-No. 910059	Art.-No. 910066	Art.-No. 704306	Art.-No. 914118	Art.-No. 718914	Art.-No. 718853